


Rotary Hole Probes




Rotary Hole Probes-Universal

Full range rotary designs with an assortment of sizes and frequency's.
Standard working length 1.5 in to 2.0 in, custom sizes and lengths on request.
For Hocking, MiniMite and Mini Rohmann Scanners.

Dia	WL	Freq 100K-2MHz Unshielded	Freq 1-3Mhz Unshielded	Freq 100K-2MHz Shielded	Freq 1-3Mhz Shielded
.125	1.5 in	AUR-.125	AUR-.125/2M	-	-
.156	1.5 in	AUR-.156	AUR-.156/2M	-	-
.187	2.0 in	-	-	AUR-.187	AUR-.187/2M
.250	2.0 in	-	-	AUR-.250	AUR-.250/2M
.312	2.0 in	-	-	AUR-.312	AUR-.312/2M
.375	2.0 in	-	-	AUR-.375	AUR-.375/2M
.437	2.0 in	-	-	AUR-.437	AUR-.437/2M
.500	2.0 in	-	-	AUR-.500	AUR-.500/2M
.625	2.0 in	-	-	AUR-.625	AUR-.625/2M
.687	2.0 in	-	-	AUR-.687	AUR-.687/2M
.750	2.0 in	-	-	AUR-.750	AUR-.750/2M
.875	2.0 in	-	-	AUR-.875	AUR-.875/2M
1.000	2.0 in	-	-	AUR-1.0	AUR-1.0/2M

Rotary Hole Probes

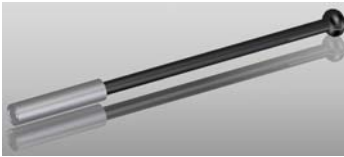


Rotary Hole Probes-Nortec

Full range rotary designs with an assortment of sizes and frequency's.
Standard working length 1.5 in to 2.0 in, custom sizes and lengths on request.
For Rechii and RA-2000 Scanner.

Dia	WL	Freq 100K-2MHz Unshielded	Freq 1-3Mhz Unshielded	Freq 100K-2MHz Shielded	Freq 1-3Mhz Shielded
.125	1.5 in	ARR-.125	ARR-.125/2M	-	-
.156	1.5 in	ARR-.156	ARR-.156/2M	-	-
.187	2.0 in	-	-	ARR-.187	ARR-.187/2M
.250	2.0 in	-	-	ARR-.250	ARR-.250/2M
.312	2.0 in	-	-	ARR-.312	ARR-.312/2M
.375	2.0 in	-	-	ARR-.375	ARR-.375/2M
.437	2.0 in	-	-	ARR-.437	ARR-.437/2M
.500	2.0 in	-	-	ARR-.500	ARR-.500/2M
.625	2.0 in	-	-	ARR-.625	ARR-.625/2M
.687	2.0 in	-	-	ARR-.687	ARR-.687/2M
.750	2.0 in	-	-	ARR-.750	ARR-.750/2M
.875	2.0 in	-	-	ARR-.875	ARR-.875/2M
1.000	2.0 in	-	-	ARR-1.0	ARR-1.0/2M

1 Year Warranty on all Parts

Adjustable “Y” Rotary Hole Probes




Adjustable “Y” Rotary Hole Probes-Universal

Full range rotary designs with an assortment of sizes and frequency's.
Standard working length 1.5 in to 2.0 in, custom sizes and lengths on request.
For Hocking, MiniMite and Mini Rohmann Scanners.

Dia	WL	Freq 100K-2MHz Unshielded	Freq 1-3MhZ Unshielded	Freq 100K-2MHz Shielded	Freq 1-3MhZ Shielded
.125-.156	1.5 in	AURY-.125-.156	AURY-.125-.156/2M	-	-
.156-.187	1.5 in	AURY-.156-.187	AURY-.156-.187/2M	-	-
.187-.218	2.0 in	-	-	AURY-.187-.218	AURY-.187-.218/2M
.218-.250	2.0 in	-	-	AURY-.218-.250	AURY-.218-.250/2M
.250-.312	2.0 in	-	-	AURY-.250-.312	AURY-.250-.312/2M
.312-.375	2.0 in	-	-	AURY-.312-.375	AURY-.312-.375/2M
.375-.437	2.0 in	-	-	AURY-.375-.437	AURY-.375-.437/2M
.437-.500	2.0 in	-	-	AURY-.437-.500	AURY-.437-.500/2M
.500-.625	2.0 in	-	-	AURY-.500-.625	AURY-.500-.625/2M
.625-.687	2.0 in	-	-	AURY-.625-.687	AURY-.625-.687/2M
.687-.750	2.0 in	-	-	AURY-.687-.750	AURY-.687-.750/2M
.750-.875	2.0 in	-	-	AURY-.750-.875	AURY-.750-.875/2M
.875-1.000	2.0 in	-	-	AURY-.875-1.0	AURY-.875-1.0/2M

1 Year Warranty on all Parts

Adjustable “Y” Rotary Hole Probes




Adjustable “Y” Rotary Hole Probes-Nortec

Full range rotary designs with an assortment of sizes and frequency's. Standard working length 1.5 in to 2.0 in, custom sizes and lengths on request. For Rechii and RA-2000 Scanner.

Dia	WL	Freq 100K-2MHz Unshielded	Freq 1-3MhZ Unshielded	Freq 100K-2MHz Shielded	Freq 1-3MhZ Shielded
.125-.156	1.5 in	ARRY-.125-.156	ARRY-.125-.156/2M	-	-
.156-.187	1.5 in	ARRY-.156-.187	ARRY-.156-.187/2M	-	-
.187-.218	2.0 in	-	-	ARRY-.187-.218	ARRY-.187-.218/2M
.218-.250	2.0 in	-	-	ARRY-.218-.250	ARRY-.218-.250/2M
.250-.312	2.0 in	-	-	ARRY-.250-.312	ARRY-.250-.312/2M
.312-.375	2.0 in	-	-	ARRY-.312-.375	ARRY-.312-.375/2M
.375-.437	2.0 in	-	-	ARRY-.375-.437	ARRY-.375-.437/2M
.437-.500	2.0 in	-	-	ARRY-.437-.500	ARRY-.437-.500/2M
.500-.625	2.0 in	-	-	ARRY-.500-.625	ARRY-.500-.625/2M
.625-.687	2.0 in	-	-	ARRY-.625-.687	ARRY-.625-.687/2M
.687-.750	2.0 in	-	-	ARRY-.687-.750	ARRY-.687-.750/2M
.750-.875	2.0 in	-	-	ARRY-.750-.875	ARRY-.750-.875/2M
.875-1.000	2.0 in	-	-	ARRY-.875-1.0	ARRY-.875-1.0/2M


Adjustable “X” Rotary Hole Probes

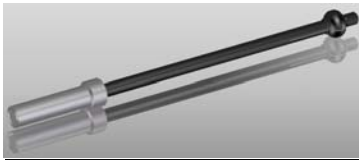

Adjustable “X” Rotary Hole Probes-Universal

Full range rotary designs with an assortment of sizes and frequency's. Standard working length 1.5 in to 2.0 in, custom sizes and lengths on request. For Hocking, MiniMite and Mini Rohmann Scanners.

Dia	WL	Freq 100K-2MHz Shielded	Freq 1-3Mhz Shielded
.187-.250	2.0 in	AURX-.187-.250	AURX-.187-.250/2M
.250-.312	2.0 in	AURX-.250-.312	AURX-.250-.312/2M
.312-.375	2.0 in	AURX-.312-.375	AURX-.312-.375/2M
.375-.437	2.0 in	AURX-.375-.437	AURX-.375-.437/2M
.437-.500	2.0 in	AURX-.437-.500	AURX-.437-.500/2M
.500-.625	2.0 in	AURX-.500-.625	AURX-.500-.625/2M
.625-.687	2.0 in	AURX-.625-.687	AURX-.625-.687/2M
.687-.750	2.0 in	AURX-.687-.750	AURX-.687-.750/2M
.750-.875	2.0 in	AURX-.750-.875	AURX-.750-.875/2M
.875-1.000	2.0 in	AURX-.875-1.0	AURX-.875-1.0/2M

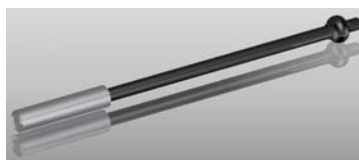


Adjustable “X” Rotary Hole Probes-Nortec

Full range rotary designs with an assortment of sizes and frequency's. Standard working length 1.5 in to 2.0 in, custom sizes and lengths on request. For Rechii and RA-2000 Scanner.

Dia	WL	Freq 100K-2MHz Shielded	Freq 1-3Mhz Shielded
.187-.250	2.0 in	ARRX-.187-.250	ARRX-.187-.250/2M
.250-.312	2.0 in	ARRX-.250-.312	ARRX-.250-.312/2M
.312-.437	2.0 in	ARRX-.312-.437	ARRX-.312-.437/2M
.375-.437	2.0 in	ARRX-.375-.437	ARRX-.375-.437/2M
.437-.500	2.0 in	ARRX-.437-.500	ARRX-.437-.500/2M
.500-.625	2.0 in	ARRX-.500-.625	ARRX-.500-.625/2M
.625-.687	2.0 in	ARRX-.625-.687	ARRX-.625-.687/2M
.687-.750	2.0 in	ARRX-.687-.750	ARRX-.687-.750/2M
.750-.875	2.0 in	ARRX-.750-.875	ARRX-.750-.875/2M
.875-1.000	2.0 in	ARRX-.875-1.0	ARRX-.875-1.0/2M

1 Year Warranty on all Parts


Flex Rotary Hole Probes

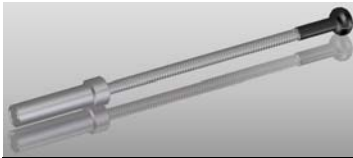

Flex Rotary Hole Probes-Universal

Full range rotary designs with an assortment of sizes and frequency's. Standard working length 3.0 in, custom sizes and lengths on request. For Hocking, MiniMite and Mini Rohmann Scanners.

Dia	WL	Freq 100K-2MHz Shielded	Freq 1-3MhZ Shielded
.187	3.0 in	AURFX-.187	AURFX-.187/2M
.250	3.0 in	AURFX-.250	AURFX-.250/2M
.312	3.0 in	AURFX-.312	AURFX-.312/2M
.375	3.0 in	AURFX-.375	AURFX-.375/2M
.437	3.0 in	AURFX-.437	AURFX-.437/2M
.500	3.0 in	AURFX-.500	AURFX-.500/2M
.625	3.0 in	AURFX-.625	AURFX-.625/2M
.687	3.0 in	AURFX-.687	AURFX-.687/2M
.750	3.0 in	AURFX-.750	AURFX-.750/2M
.875	3.0 in	AURFX-.875	AURFX-.875/2M
1.000	3.0 in	AURFX-1.0	AURFX-1.0/2M

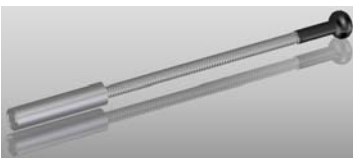


Flex Rotary Hole Probes-Nortec

Full range rotary designs with an assortment of sizes and frequency's. Standard working length 3.0 in, custom sizes and lengths on request. For Rechii and RA-2000 Scanner.

Dia	WL	Freq 100K-2MHz Shielded	Freq 1-3MhZ Shielded
.187	3.0 in	ARRFX-.187	ARRFX-.187/2M
.250	3.0 in	ARRFX-.250	ARRFX-.250/2M
.312	3.0 in	ARRFX-.312	ARRFX-.312/2M
.375	3.0 in	ARRFX-.375	ARRFX-.375/2M
.437	3.0 in	ARRFX-.437	ARRFX-.437/2M
.500	3.0 in	ARRFX-.500	ARRFX-.500/2M
.625	3.0 in	ARRFX-.625	ARRFX-.625/2M
.687	3.0 in	ARRFX-.687	ARRFX-.687/2M
.750	3.0 in	ARRFX-.750	ARRFX-.750/2M
.875	3.0 in	ARRFX-.875	ARRFX-.875/2M
1.000	3.0 in	ARRFX-1.0	ARRFX-1.0/2M

1 Year Warranty on all Parts


Counter Sink Probes



Rotary Counter Sink Probes-Universal

Full range Counter Sink designs with an assortment of sizes and frequency's.
Standard working length 2.0 in, custom sizes and lengths on request. For
Hocking, MiniMite and Mini Rohmann Scanners.

Dia	WL	Freq 100K-2MHz Unshielded	Freq 1-3MHz Unshielded	Freq 100K-2MHz Shielded	Freq 1-3MHz Shielded
.156	2.0 in	AURCS100-.156	AURCS100-.156/2M	AURCSF100-.156	AURCSF100-.156/2M
.187	2.0 in	AURCS100-.187	AURCS100-.187/2M	AURCSF100-.187	AURCSF100-.187/2M
.250	2.0 in	AURCS100-.250	AURCS100-.250/2M	AURCSF100-.250	AURCSF100-.250/2M




Rotary Counter Sink Probes-Nortec

Full range Counter Sink designs with an assortment of sizes and frequency's.
Standard working length 2.0 in, custom sizes and lengths on request. For Rechii
and RA-2000 Scanner.

Dia	WL	Freq 100K-2MHz Unshielded	Freq 1-3MHz Unshielded	Freq 100K-2MHz Shielded	Freq 1-3MHz Shielded
.156	2.0 in	ARRCS100-.156	ARRCS100-.156/2M	ARRCSF100-.156	ARRCSF100-.156/2M
.187	2.0 in	ARRCS100-.187	ARRCS100-.187/2M	ARRCSF100-.187	ARRCSF100-.187/2M
.250	2.0 in	ARRCS100-.250	ARRCS100-.250/2M	ARRCSF100-.250	ARRCSF100-.250/2M


Counter Sink Probes



Manual Counter Sink Probes-Triax

Full range Counter Sink designs with an assortment of sizes and frequency's.
Standard working length 2.0 in, custom sizes and lengths on request.

Dia	WL	Freq 50-500Khz Unshielded	Freq 1-3MhZ Unshielded	Freq 50-500Khz Shielded	Freq 1-3MhZ Shielded
.156	2.0 in	ACST100-.156	ACST100-.156/2M	ACST100F-.156	ACST100F-.156/2M
.187	2.0 in	ACST100-.187	ACST100-.187/2M	ACST100F-.187	ACST100F-.187/2M
.250	2.0 in	ACST100-.250	ACST100-.250/2M	ACST100F-.250	ACST100F-.250/2M




Manual Counter Sink Probes-Microdot

Full range Counter Sink designs with an assortment of sizes and frequency's.
Standard working length 2.0 in, custom sizes and lengths on request.

Dia	WL	Freq 50-500Khz Unshielded	Freq 1-3MhZ Unshielded	Freq 50-500Khz Shielded	Freq 1-3MhZ Shielded
.156	2.0 in	ACSM100-.156	ACSM100-.156/2M	ACSM100F-.156	ACSM100F-.156/2M
.187	2.0 in	ACSM100-.187	ACSM100-.187/2M	ACSM100F-.187	ACSM100F-.187/2M
.250	2.0 in	ACSM100-.250	ACSM100-.250/2M	ACSM100F-.250	ACSM100F-.250/2M


Pencil Probes

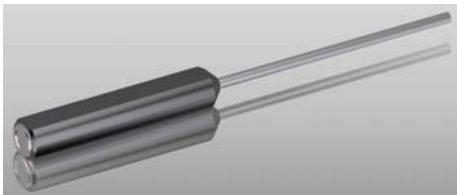

Straight Pencil Probes-Triax

Full range Pencil designs with an assortment of shaft sizes and frequency's. Standard working length 5.0 in, custom sizes and lengths on request.


Shaft Dia	WL	Freq 50-500KHz Shielded	Freq 50-500KHz Unshielded	Freq 500k-1MHz Unshielded	Freq 500k-1MHz Shielded	Freq 1-3MHz Unshielded	Freq 1-3MHz Shielded
.072 in	5.0 in	AXTPN-5	-	-	AXTPN-5/500K	-	AXTPN-5/2M
.093 in	5.0 in	ASTPN-5	-	-	ASTPN-5/500K	-	ASTPN-5/2M
.125 in	5.0 in	ATPN-5	ATPNU-5	ATPNU-5/500K	ATPN-5/500K	ATPNU-5/2M	ATPN-5/2M

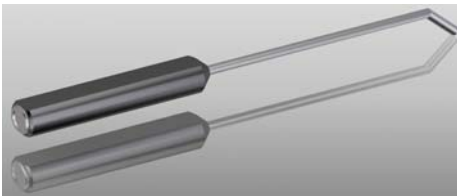

45 Deg Pencil Probes-Triax

Full range Pencil designs with an assortment of shaft sizes and frequency's. Standard 45 deg x .5 in drop with working length 5.0 in, custom sizes and lengths on request.

Shaft Dia	Drop/WL	Freq 50-500KHz Shielded	Freq 50-500KHz Unshielded	Freq 500k-1MHz Unshielded	Freq 500k-1MHz Shielded	Freq 1-3MHz Unshielded	Freq 1-3MHz Shielded
.072 in	.5 in/5.0 in	AXTPN45-5	-	-	AXTPN45-5/500K	-	AXTPN45-5/2M
.093 in	.5 in/5.0 in	ASTPN45-5	-	-	ASTPN45-5/500K	-	ASTPN45-5/2M
.125 in	.5 in/5.0 in	ATPN45-5	ATPNU45-5	ATPNU45-5/500K	ATPN45-5/500K	ATPNU45-5/2M	ATPN45-5/2M

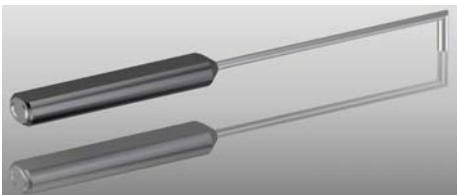


90 Deg Pencil Probes-Triax

Full range Pencil designs with an assortment of shaft sizes and frequency's. Standard 90 deg x.5 in drop with working length 5.0 in, custom sizes and lengths on request.

Shaft Dia	Drop/WL	Freq 50-500KHz Shielded	Freq 50-500KHz Unshielded	Freq 500k-1MHz Unshielded	Freq 500k-1MHz Shielded	Freq 1-3MHz Unshielded	Freq 1-3MHz Shielded
.072 in	.5 in/5.0 in	AXTPN95-5	-	-	AXTPN95-5/500K	-	AXTPN95-5/2M
.093 in	.5 in/5.0 in	ASTPN95-5	-	-	ASTPN95-5/500K	-	ASTPN95-5/2M
.125 in	.5 in/5.0 in	ATPN95-5	ATPNU95-5	ATPNU95-5/500K	ATPN95-5/500K	ATPNU95-5/2M	ATPN95-5/2M

1 Year Warranty on all Parts


Pencil Probes

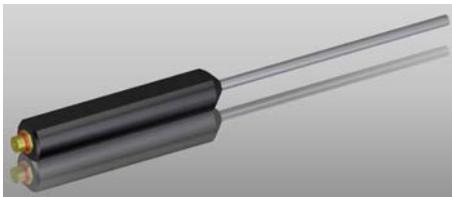

Straight Pencil Probes-Microdot

Full range Pencil designs with an assortment of shaft sizes and frequency's. Standard working length 5.0 in, custom sizes and lengths on request. Specify Hocking Instrument frequency range on request.


Shaft Dia	WL	Freq 50-500KHz Shielded	Freq 50-500KHz Unshielded	Freq 500k-1MHz Unshielded	Freq 500k-1MHz Shielded	Freq 1-3MHz Unshielded	Freq 1-3MHz Shielded
.072 in	5.0 in	AXPN-5	-	-	AXPN-5/500K	-	AXPN-5/2M
.093 in	5.0 in	ASPN-5	-	-	ASPN-5/500K	-	ASPN-5/2M
.125 in	5.0 in	APN-5	APNU-5	APNU-5/500K	APN-5/500K	APNU-5/2M	APN-5/2M

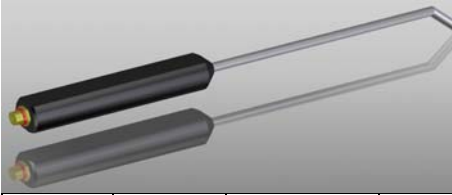

45 Deg Pencil Probes-Microdot

Full range Pencil designs with an assortment of shaft sizes and frequency's. Standard 45 deg x .5 in drop with working length 5.0 in, custom sizes and lengths on request. Specify Hocking Instrument frequency range on request.

Shaft Dia	Drop/WL	Freq 50-500KHz Shielded	Freq 50-500KHz Unshielded	Freq 500k-1MHz Unshielded	Freq 500k-1MHz Shielded	Freq 1-3MHz Unshielded	Freq 1-3MHz Shielded
.072 in	.5 in/5.0 in	AXPN45-5	-	-	AXPN45-5/500K	-	AXPN45-5/2M
.093 in	.5 in/5.0 in	ASPN45-5	-	-	ASPN45-5/500K	-	ASPN45-5/2M
.125 in	.5 in/5.0 in	APN45-5	APNU45-5	APNU45-5/500K	APN45-5/500K	APNU45-5/2M	APN45-5/2M

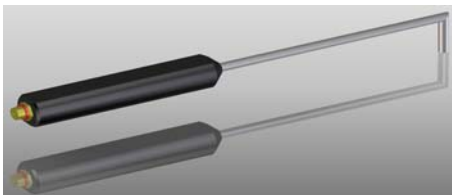


90 Deg Pencil Probes-Microdot

Full range Pencil designs with an assortment of shaft sizes and frequency's. Standard 90 deg x.5 in drop with working length 5.0 in, custom sizes and lengths on request. Specify Hocking Instrument frequency range on request.

Shaft Dia	Drop/WL	Freq 50-500KHz Shielded	Freq 50-500KHz Unshielded	Freq 500k-1MHz Unshielded	Freq 500k-1MHz Shielded	Freq 1-3MHz Unshielded	Freq 1-3MHz Shielded
.072 in	.5 in/5.0 in	AXPN95-5	-	-	AXPN95-5/500K	-	AXPN95-5/2M
.093 in	.5 in/5.0 in	ASPN95-5	-	-	ASPN95-5/500K	-	ASPN95-5/2M
.125 in	.5 in/5.0 in	APN95-5	APNU95-5	APNU95-5/500K	APN95-5/500K	APNU95-5/2M	APN95-5/2M

1 Year Warranty on all Parts


Blade Probes



Straight Blade Probes-Triax

Full range Blade designs with an assortment of shaft sizes, thickness and frequency's. Standard working length 5.0 in, custom sizes, thickness and lengths on request. Specify Hocking Instrument frequency range on request.

Shaft Thickness	WL	Angle	Freq 50-500KHz
.045 in	6.0 in	Straight	ATBL045-6
.060 in	6.0 in	Straight	ATBL060-6
.090 in	6.0 in	Straight	ATBL090-6




30,45,60,90 Deg Blade Probes-Triax

Full range Blade designs with an assortment of shaft sizes, thickness and frequency's. Standard .5 in drop with working length 5.0 in, custom sizes, thickness and lengths on request. Specify Hocking Instrument frequency range on request.

Shaft Thickness	WL	Angle	Freq 50-500KHz
.060 in	6.0 in	30 Deg	ATBL360-6
.090 in	6.0 in	30 Deg	ATBL390-6
.045 in	6.0 in	45 Deg	ATBL445-6
.060 in	6.0 in	45 Deg	ATBL460-6
.090 in	6.0 in	45 Deg	ATBL490-6
.045 in	6.0 in	60 Deg	ATBL645-6
.060 in	6.0 in	60 Deg	ATBL660-6
.045 in	6.0 in	90 Deg	ATBL945-6
.060 in	6.0 in	90 Deg	ATBL960-6


Blade Probes



Straight Blade Probes-Microdot

Full range Blade designs with an assortment of shaft sizes, thickness and frequency's. Standard working length 5.0 in, custom sizes, thickness and lengths on request. Specify Hocking Instrument frequency range on request.

Shaft Thickness	WL	Angle	Freq 50-500KHz
.045 in	6.0 in	Straight	ABL045-6
.060 in	6.0 in	Straight	ABL060-6
.090 in	6.0 in	Straight	ABL090-6



30,45,60,90 Deg Blade Probes-Microdot

Full range Blade designs with an assortment of shaft sizes, thickness and frequency's. Standard .5 in drop with working length 5.0 in, custom sizes, thickness and lengths on request. Specify Hocking Instrument frequency range on request.

Shaft Thickness	WL	Angle	Freq 50-500KHz
.060 in	6.0 in	30 Deg	ABL360-6
.090 in	6.0 in	30 Deg	ABL390-6
.045 in	6.0 in	45 Deg	ABL445-6
.060 in	6.0 in	45 Deg	ABL460-6
.090 in	6.0 in	45 Deg	ABL490-6
.045 in	6.0 in	60 Deg	ABL645-6
.060 in	6.0 in	60 Deg	ABL660-6
.045 in	6.0 in	90 Deg	ABL945-6
.060 in	6.0 in	90 Deg	ABL960-6

Ring and Spot Probes



Ring Low Frequency Probes-Triax

Full range Ring designs with an assortment of sizes and frequency's. Custom sizes and lengths on request. Specify OD, ID and Height when ordering.

Frequency's	Freq 50-500Hz	Freq 100Hz-1KHz	Freq 500Hz-2KHz	Freq 1-10KHz	Freq 5-20KHz	Freq 20-500KHz
-------------	---------------	-----------------	-----------------	--------------	--------------	----------------



Spot Low Frequency Probes-Triax

Full range Ring designs with an assortment of sizes and frequency's. Custom sizes and lengths on request. Specify OD, ID and Height when ordering.

Frequency's	Freq 50-500Hz	Freq 100Hz-1KHz	Freq 500Hz-2KHz	Freq 1-10KHz	Freq 5-20KHz	Freq 20-500KHz
-------------	---------------	-----------------	-----------------	--------------	--------------	----------------



Ring Low Frequency Probes-Microdot

Full range Ring designs with an assortment of sizes and frequency's. Custom sizes and lengths on request. Specify OD, ID and Height when ordering.

Frequency's	Freq 50-500Hz	Freq 100Hz-1KHz	Freq 500Hz-2KHz	Freq 1-10KHz	Freq 5-20KHz	Freq 20-500KHz
-------------	---------------	-----------------	-----------------	--------------	--------------	----------------




Spot Low Frequency Probes-Microdot

Full range Ring designs with an assortment of sizes and frequency's. Custom sizes and lengths on request. Specify OD, ID and Height when ordering.

Frequency's	Freq 50-500Hz	Freq 100Hz-1KHz	Freq 500Hz-2KHz	Freq 1-10KHz	Freq 5-20KHz	Freq 20-500KHz
-------------	---------------	-----------------	-----------------	--------------	--------------	----------------

Sliding Surface Probes



Sliding Surface Probes-Triax

Full range Surface designs with an assortment of sizes and frequency's. Custom designs on request.

Frequency's	Freq 50-500Hz	Freq 100Hz-1KHz	Freq 500Hz-2KHz	Freq 1-10KHz	Freq 5-20KHz	Freq 20-500KHz
-------------	---------------	-----------------	-----------------	--------------	--------------	----------------




Sliding Surface Probes-Microdot

Full range Surface designs with an assortment of sizes and frequency's. Custom designs on request.


Frequency's	Freq 50-500Hz	Freq 100Hz-1KHz	Freq 500Hz-2KHz	Freq 1-10KHz	Freq 5-20KHz	Freq 20-500KHz
-------------	---------------	-----------------	-----------------	--------------	--------------	----------------

Reference Standards

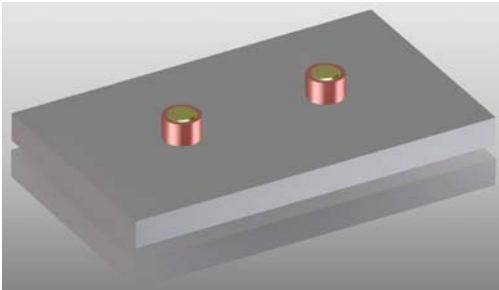


Bolt Reference Standards

Full range of Configurations and Materials with an assortment surface, corner and mid-wall EDM notches. Custom designs on request.

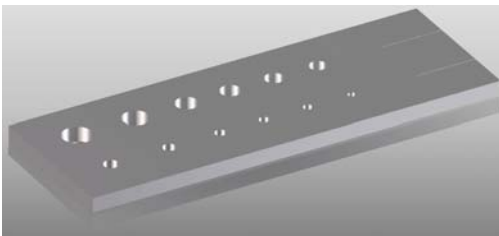


Hole Reference Standards

Full range of Hole Configurations and Materials with an assortment surface, corner and mid-wall EDM notches. Custom designs on request.

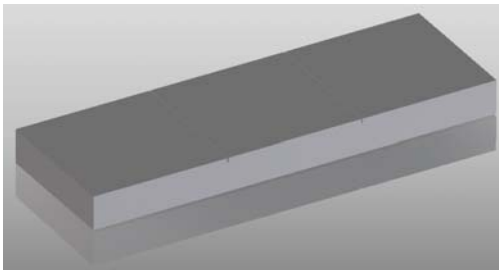

Surface Reference Standards

Full range of Configurations and Materials with an assortment surface and corner EDM notches. Custom designs on request.

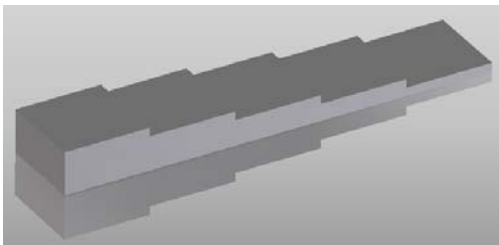


Ultrasonic Reference Standards

Full range of UT configurations and Custom designs on request.



Cable and Adaptors

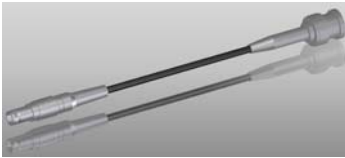

Cables

Full range Cable designs with an assortment of connector configurations. Standard working length 6 ft, custom lengths on request.



Adaptors

Full range Adaptor designs with an assortment of connector configurations. Custom configurations on request.



Rotary Scanner Adaptors

Full range Scanner Adaptor designs with an assortment configurations that fit all rotary scanner guns.



Probe Kits




Surface Probe Kits

Full range Surface kits with an assortment of sizes and frequency's. Standard working lengths, custom lengths and configurations on request.



Ultra Sonic Probe Kits

Full range Ultra Sonic kits with an assortment of sizes and frequency's. Custom Sizes and Frequency's on request.

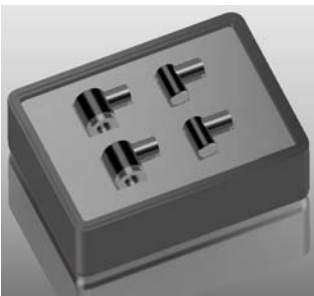

Low Frequency Probe Kits

Full range LF kits with an assortment of sizes and frequency's. Standard working lengths, custom sizes and configurations on request.



Custom Probe and Kit Designs



Custom Probe, Transducer kits with all sizes and frequencies. Can also include Cables.

Combination Probe and Standard kits for all applications.



DISTRIBUÉ PAR / DISTRIBUTED BY:

QNDE
QUALITY NDE LTD

QUEBEC

164, St-Jean-Baptiste
Mercier, QC J6R 2C2
450-691-9090
info@qn.de.ca



ONTARIO

275, Sheldon Drive, Unit 3
Cambridge, ON N1T 1A3
519-894-9069
nadams@qn.de.ca

ALBERTA

7307, 50 street NW
Edmonton, AB T6B 2J9
587-689-6811
lfields@qn.de.ca

www.qn.de.ca

1-800-361-3630