

MEETS STANDARDS FOR



EN ISO:3059

SPECTROLINE®
NDT

OPTI-LUX™ 365 SERIES

LED UV-A Inspection Lamps

OLX-365 SERIES

Spot fluorescent indications in the smallest of spaces.



Rechargeable
Battery



Bright &
Uniform Beams



Instant-On
Operation



Small Space
Inspection

CONVENIENT
ON/OFF SWITCH
For easy one-handed
operation

ULTRA
VIOLET
LED

ANODIZED ALUMINUM
LAMP BODY

Minimizes corrosion and stands
up to years of heavy use



CERTIFICATE OF
LIGHT OUTPUT
included with lamp

4 AVAILABLE IN
MODELS:

High-Intensity & Standard-Intensity
both with and/or without UV-A pass filters

DISTRIBUE PAR / DISTRIBUTED BY:

QNDÉ
QUALITY NDE LTD

QUEBEC

164, St-Jean-Baptiste
Mercier, QC J6R 2C2
450-401-0060
info@qn timer.ca

ONTARIO

275, Sheldon Drive, Unit 3
Cambridge, ON N1T 1A3
519-894-0060
nadams@qn timer.ca

ALBERTA

7307, 50 street NW
Edmonton, AB T6B 2J9
587-498-6811
lfields@qn timer.ca

www.qn timer.ca

1-800-361-3630

OPTI-LUX™ 365 OLX-365 SERIES

MODEL	HIGH INTENSITY	STANDARD INTENSITY	CLEAR FILTER	INTERNAL BACK LIGHT FILTER	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ①	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 µW/cm²
OLX-365	●		●		10,000 µW/cm²	0.8 foot-candles (8.6 lux)	2 in (5 cm)
OLX-365B	●			●	10,000 µW/cm²	0.4 foot-candles (4.3 lux)	2 in (5 cm)
OLX-365FL		●	●		4,500 µW/cm²	0.3 foot-candles (3.2 lux)	2.5 in (6.3 cm)
OLX-365BFL		●		●	4,500 µW/cm²	0.2 foot-candles (2.1 lux)	2.5 in (6.3 cm)

Light Source: UV-A LED
Lamp Style: Cordless flashlight
Lamp Head Diameter: 1.25 in (3.2 cm)
Length: 5.9 in (15 cm)
Power Requirements: One 3.7V 2200mA/Hr lithium-ion battery (rechargeable)
Weight (w/Battery): 4.6 oz (130 g)
Run Time: 4 hours (continuous)
Charge Time: 4 hours (one or two batteries)
Charging Cradle: Two-battery capability with AC and DC cord sets*


① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.

*(Also available in 100-120V, 230V & 240V versions)




OPTI-LUX™ 365 SERIES FLASHLIGHT KITS
 Come complete with OPX-365 LED UV-A (365 nm) lamp with lanyard, two rechargeable batteries, smart charging cradle with AC and DC cord sets, UV-absorbing spectacles, belt holder and a hard carrying case.


HIGH-INTENSITY UV-A Beam Profile

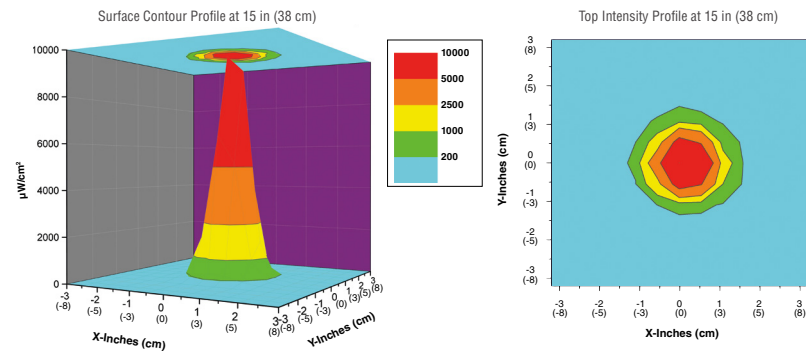


STANDARD-INTENSITY UV-A Beam Profile

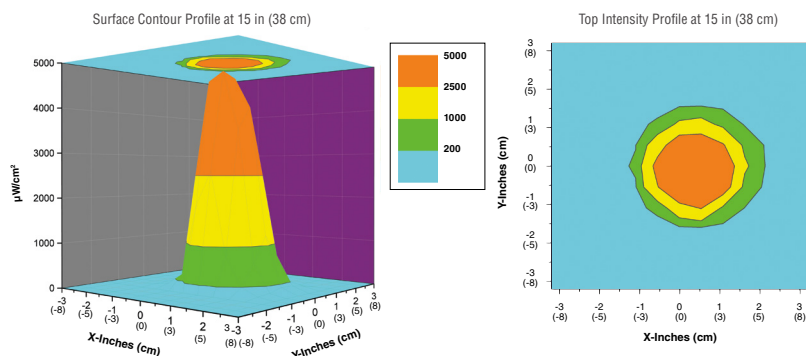

Normalized UV Irradiance

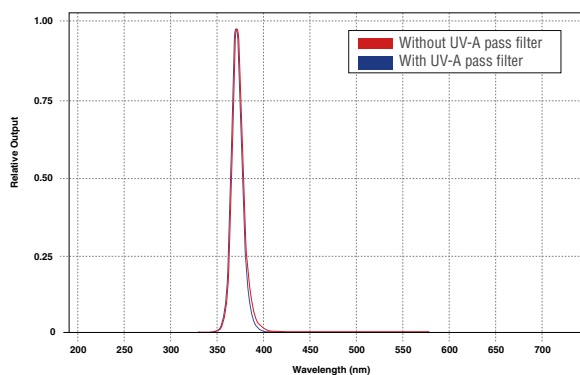

Select Wavelength With and Without UV-A pass filter

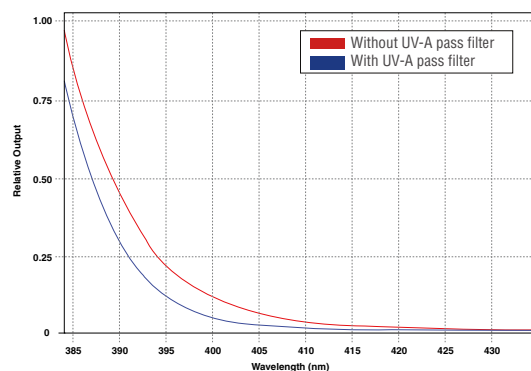

DISTRIBUE PAR / DISTRIBUTED BY:

QNDE
 QUALITY NDE LTD

QUEBEC
 164, St-Jean-Baptiste
 Mercier, QC J6R 2C2
 450-691-0000
 info@qn.de.ca

ONTARIO
 7307, 50 street NW
 Cambridge, ON N1T 1A3
 519-894-2069
 nadams@qn.de.ca

ALBERTA
 7307, 50 street NW
 Edmonton, AB T6B 2J9
 587-688-6811
 ifields@qn.de.ca

www.qn.de.ca

1-800-361-3630