



## **C4 Magnum Glo-Black LED UV-A LIGHT**

***American. Brilliance.***

Tested to comply with both

ASTM

E3022

Standard

Rolls-Royce

RRES 90061

Requirements

***1-Year Warranty***



DISTRIBUÉ PAR / DISTRIBUTED BY:



QUEBEC

164, St-Jean-Baptiste

Mercier, QC J6R 2C2

T : (450) 691-9090

ONTARIO

275 Sheldon Drive, Unit 3

Cambridge, ON N1T 1A3

T : (519) 894-9069

[www.qnde.ca](http://www.qnde.ca)



C4 Magnum LED  
UV-A LED Light Characteristics



Performance Attributes	Parameters
Maximum Irradiance (at 15 in/38cm)	5000 $\mu\text{W}/\text{cm}^2$
Peak Wavelength	365 $\pm$ 5 nm
Irradiance at Peak Wavelength (at 15 in)	> 200 $\mu\text{W}/\text{cm}^2$
Typical Irradiated Area (profile at 15 in)	Circular Spot 9" Diameter > 1000 $\mu\text{W}/\text{cm}^2$ (347-382nm)
Emission Spectrum	
Full Width at Half Maximum (FWHM)	$\leq$ 15 nm
Longest Wavelength at Half Max (LWHM)	$\leq$ 380 nm
Full width at 10% Maximum	$\leq$ 30 nm
Excitation Irradiance (347-382 nm)	> 2500 $\mu\text{W}/\text{cm}^2$
Wavelength Drift (at 70°F ambient)	$\leq$ 3 nm
Working Distances	
ASTM	Minimum WD $\leq$ 5 in
RRES 90061	Minimum WD = 15 in
	Maximum WD = 36 in
Typical Visible Emission	
ASTM range (400-760 nm)	$\leq$ 2 ft candles
RRES 90061 range (390-800 nm)	$\leq$ 20 lux at 15 in
	$\leq$ 5 lux at 36 in

Physical Attributes	Parameters
Operating Environment	32 - 120°F
Maximum Housing Temperature (at 70° F ambient)	116°F
Lamp Cord Length	10 ft
Power Supply Cord Length	6 ft
Weight	1.8 lb
Power in	90-264 VAC / 47 ~ 63Hz < 0.6A
Specification Compliance	ASTM E3022
	RRES 90061

9" diameter spot size @ 15"  
w/ irradiance > 1000  $\mu\text{W}/\text{cm}^2$



LED Output Profile at 15 Inches  
C4 Magnum LED UV-A Beam Profile

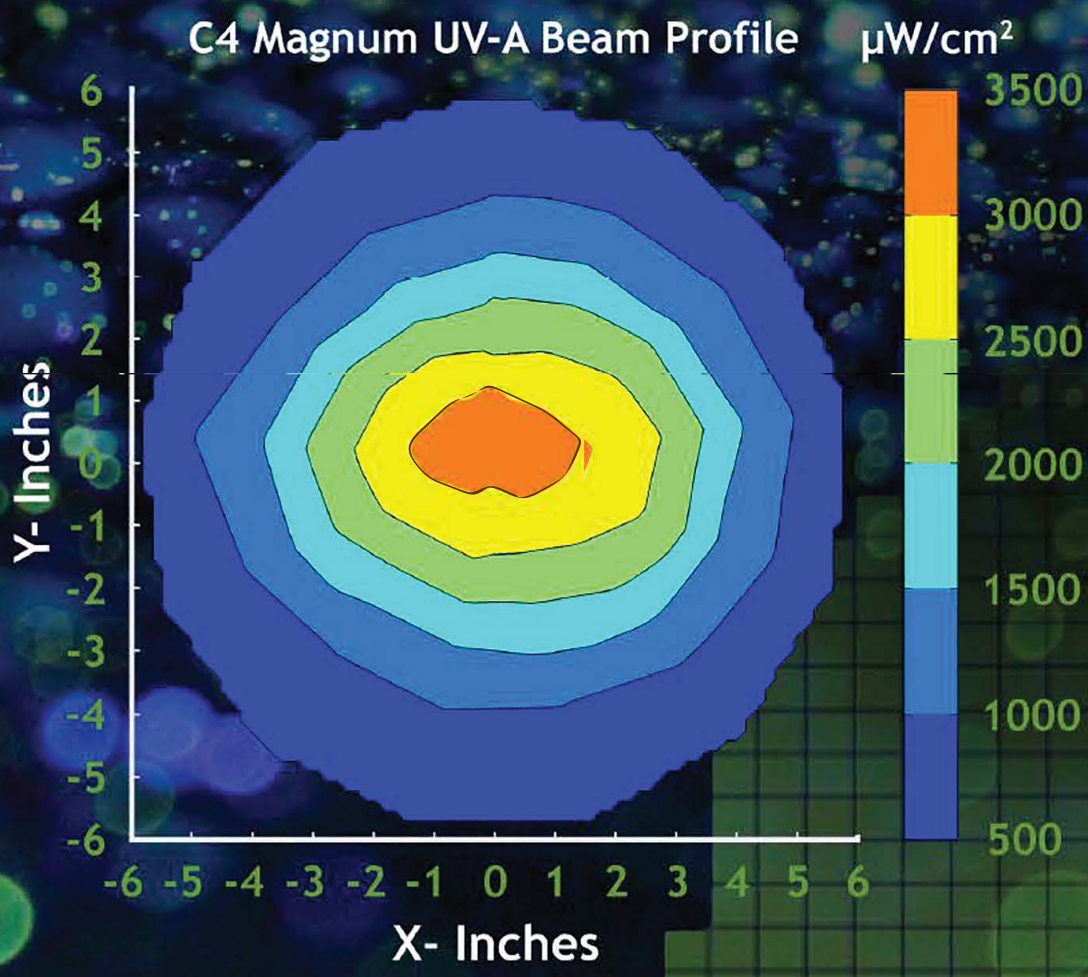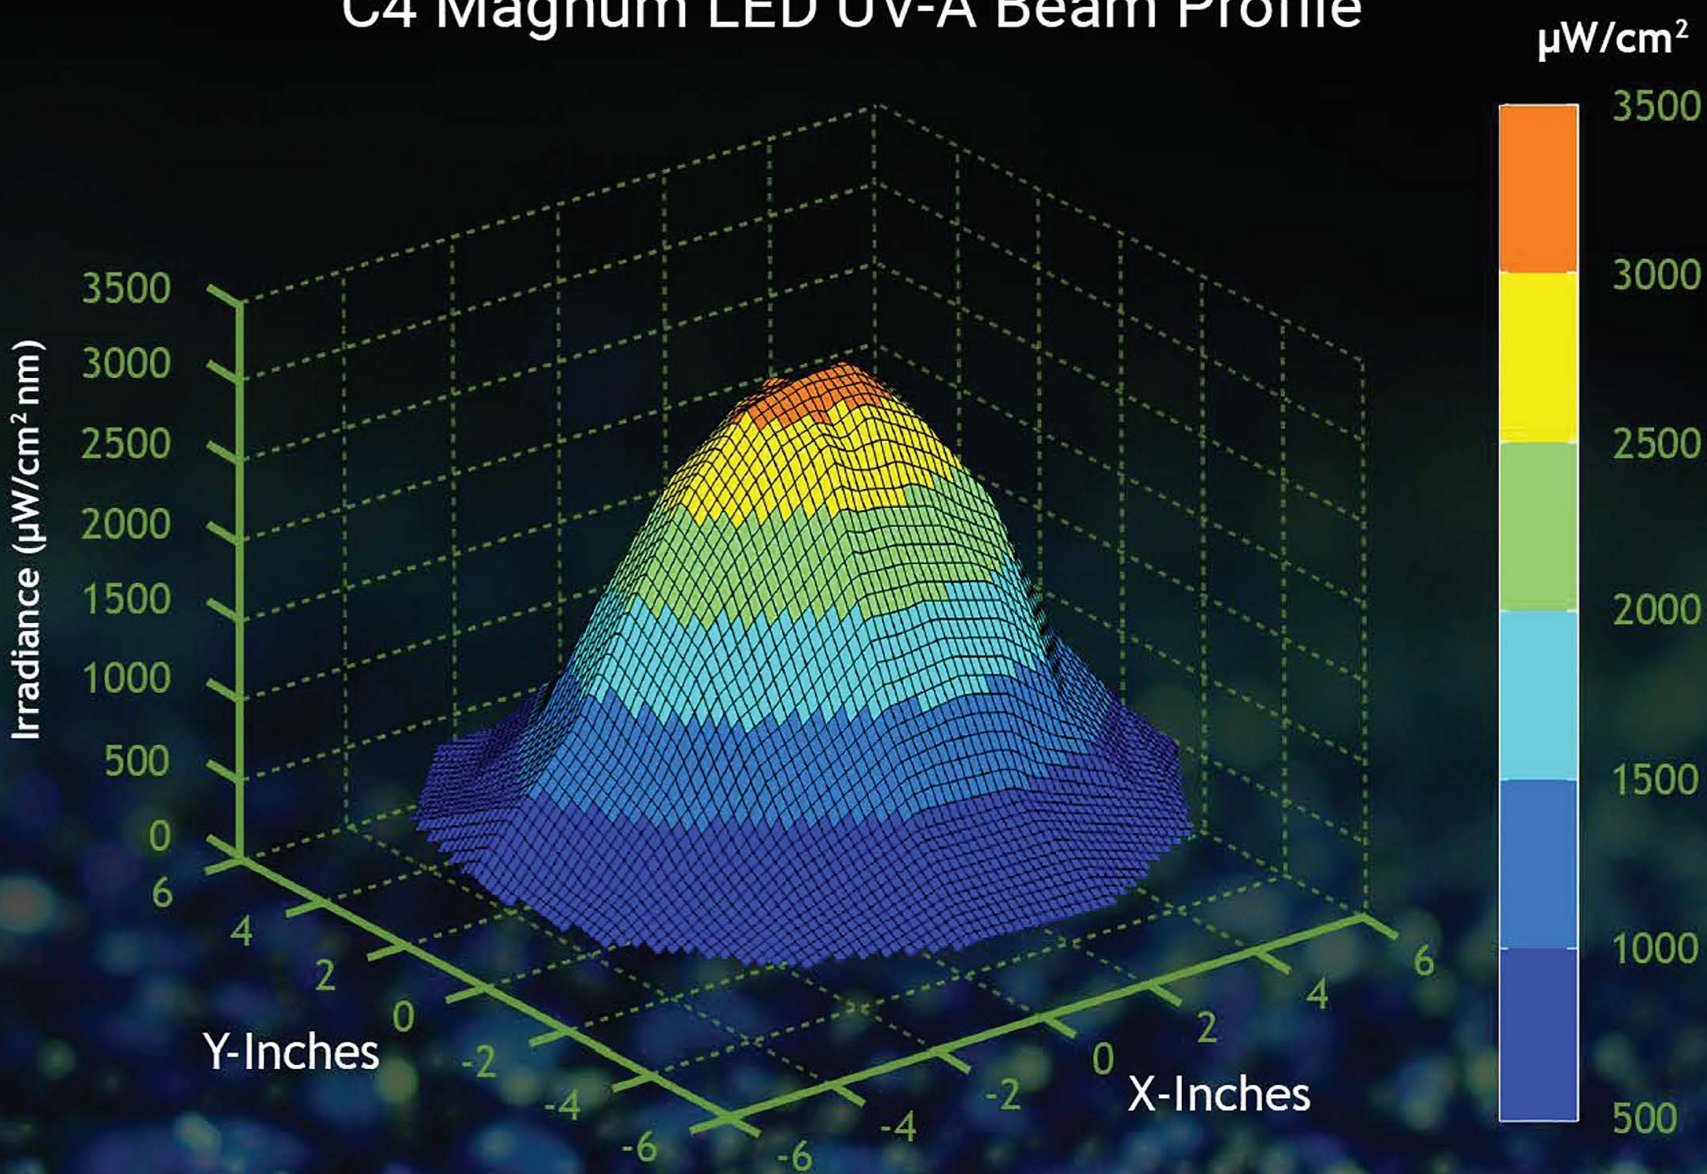





////////// 1-Year Warranty //////////



The REL C4 Magnum Glo-Black LED UV-A inspection light utilizes the latest in safe high output LED technology. This ergonomically designed LED UV-A inspection light is a highly maneuverable, lightweight solution that maximizes operator safety and time on task.

The C4 Magnum is designed for all intensity requirements of Fluorescent Penetrant Inspection (FPI) and Magnetic Particle Inspection (MPI). The C4 Magnum provides a 9-inch diameter of UV-A intensity above 1000  $\mu\text{W}/\text{cm}^2$  at 15 inches. The integral filter in the C4 Magnum limits the visible light to 20 lux (1.86 foot-candles) at 15 inches and 5 lux (0.47 foot-candles) at 36 inches. REL's C4 Magnum Inspection lights contain high flux-UV LED emitters with built-in static-electric discharge circuits. The light's electrical components are sealed and passively cooled within an engineered finned housing manufactured from military grade aluminum. This allows the light to perform in all environments regardless of ambient conditions. The C4 Magnum LED UV-A Glo-Black light will survive the toughest, wettest, and most severe work environments on the planet!

#### **Kit includes:**

- C4 Magnum Glo-Black LED UV-A light
- 120V plug-in wall adapter
- Rugged watertight case
- Power cords
- Safety glasses



#### **C4 Magnum LED attributes:**

- Certificate of Conformance and a serialized validation report
- Tested to comply with Rolls-Royce RRES 90061 Requirements
- Tested to comply with ASTM E3022 Standard
- Input voltage 90V-264V AC
- Tested to work as hard as you do
- Refurbishable

#### **Directions For Use**

1. Remove from impact resistant carrying case.
2. Drop
3. Kick
4. Use

**\*Note: Steps 2-4 can be performed in any order!**

DISTRIBUÉ PAR / DISTRIBUTED BY:



QUEBEC  
164, St-Jean-Baptiste  
Mercier, QC J6R 2C2  
T : (450) 691-9090

ONTARIO  
275 Sheldon Drive, Unit 3  
Cambridge, ON N1T 1A3  
T : (519) 894-9069

[www.qnde.ca](http://www.qnde.ca)

**Weight: 1.8 lb.**

