

**SENTINEL™**  
*YOUR KEY TO NDT*

# 880

S E R I E S   S O U R C E   P R O J E C T O R



150Ci



**DELTA**

50Ci



**ELITE**

15Ci



**OMEGA**




# 880

## SERIES SOURCE PROJECTOR

### Applications

Model 880 series exposure devices are used for industrial applications of gamma radiography, mainly with Iridium-192, to inspect materials and structures in the density range of approximately  $2.71\text{g/cm}^3$  through  $8.53\text{g/cm}^3$ . Low energy isotopes can be accommodated to permit radiography of materials and structures of thin sections of steel and low-density alloys.

The 880 series exposure devices are also designed for use with low activity sources with high photon energies for mass absorption (gamma scanning) studies of high-density materials up to  $18.7\text{g/cm}^3$ .

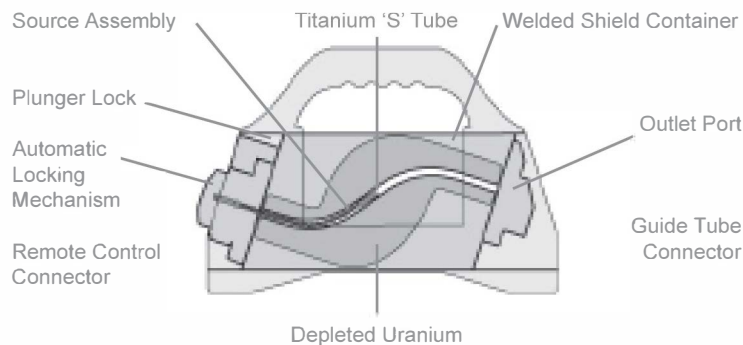

Comfortable carrying handle with slip-resistant contoured grip

### Exposure Device


SENTINEL™ Model 880 Delta, Elite and Omega source projectors are portable, lightweight and compact industrial radiographic exposure devices. The exposure device body consists of a titanium 'S' tube and cast Depleted Uranium (DU) shield contained within a 300 series stainless steel tube with stainless steel discs welded at each end forming a cylinder shaped housing. The discs are recessed to provide protection for the rear mounted locking mechanism and front mounted outlet port.

The horizontally oriented design allows the locking mechanism, source assembly connector and outlet port to be easily operated, simplifying the connection of source guide tubes and projection sheaths.

The internal void space of the housing is filled with rigid foam to prevent the ingress of water or foreign material, but is open to atmospheric pressure.

The exposure device body, containing the DU shield, locking mechanism, outlet port, protective covers and required labels, comprises the radioactive material transport Type B package\*.

Resilient one-piece plastic jacket protects the main body, outlet port, lock mechanism and labels from wear and accidental damage

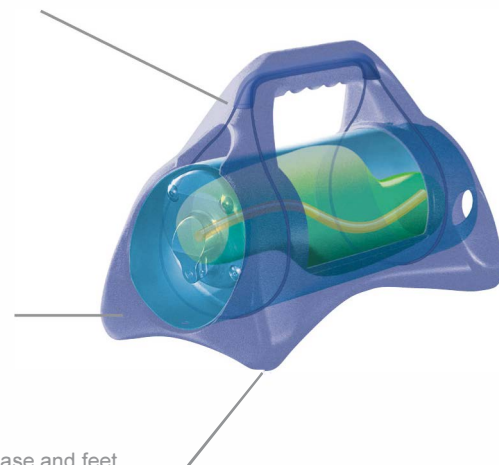

Shaped base and feet, and low center of gravity provide greater stability on convex and concave surfaces

The welded main body houses the source assembly safely stored inside a titanium 'S' tube within a depleted uranium shield



The exposure device, alone, continues to be a compliant Type B package even if the jacket has been removed\*

\*880 Omega is a Type A package only.



# DELTA

## 150 Ci

The lightest 150 Ci device currently available

# ELITE

## 50 Ci

Ideal for use with low-energy isotopes and lower activity Ir-192 sources

# OMEGA

## 15 Ci

Designed to minimize weight and maximize offshore capability with Ir-192 and Se-75




### Removable Jacket

An impact resistant plastic jacket surrounds the exposure device to protect labels and provide the means for carrying and placement during radiographic operations. The jacket incorporates a contoured handle and a quadruped base for stable positioning.

The three models are differentiated by device labels and jacket color; yellow for the 880 Delta, blue for the 880 Elite, and orange for the 880 Omega.



Lock slide is easily reset with fingertip



### Guide Tube Interface

Unique outlet port design simplifies the guide tube connection/disconnection without an elevation of radiation levels, and prevents the source assembly from being projected unless a guide tube is safely attached. An integral outlet port shield minimizes operator hand dose in compliance with ISO 3999, thus eliminating the need for an additional shipping plug.

880 Series Projectors are designed, manufactured and approved for use with SENTINEL™ authorized controls and accessories only.

### Control Interface

The locking mechanism prevents unintentional remote control operation and automatically secures the source assembly in the locked and fully shielded position when fully retracted into the device.

Disconnection of the remote control is prevented unless the source assembly is fully secured and shielded.

DISTRIBUÉ PAR / DISTRIBUTED BY:



**QUEBEC**  
164, St-Jean-Baptiste  
Mercier, QC J6R 2C2  
T : (450) 691-9090

**ONTARIO**  
275 Sheldon Drive, Unit 3  
Cambridge, ON N1T 1A3  
T : (519) 894-9069

[www.qnde.ca](http://www.qnde.ca)



All goods and services are sold subject to the terms and conditions of QSA Global, Inc. A copy of these terms and conditions is available upon request.

SENTINEL™ is a registered trademark of QSA in USA, Canada, South Korea, and Europe.

All brand names and product names where used are acknowledged to be trademarks of their respective holders.

© 2010 QSA Global, Inc.

BRO001 October 2010

## Technical Specifications

<b>880 Model Series</b> Delta   Elite   Omega				
<b>Primary Application</b> Industrial Gamma Radiography				
<b>Dimensions (All Models)</b>		<b>Weight</b>		
Length	13.33 in (33.8 cm)	Delta	52 lb (23.6 kg)	
Width	7.5 in (19.1 cm)	Elite	42 lb (19.0 kg)	
Height	9 in (22.9 cm)	Omega	33 lb (15.0 kg)	
<b>Activity of Depleted Uranium Shield</b> Delta 5.4mCi (200MBq), Elite 3.8mCi (141MBq), Omega 2.7mCi (101MBq)				
<b>Certification</b>				
Delta, Elite	Type B(U) package, USNRC & USDOT Certification Number USA/9296/B(U)-96 Type B(U) package, CNSC CDN/E199/96			
Omega	Type A transport package, 49CFR173.415 and IAEA TS-R-1 (1996 Revised)			
<b>Accreditation</b> SENTINEL™ 880 Delta, Elite, and Omega models are designed, tested and manufactured to meet the requirements of ANSI N432-1980, ISO 3999:2004(E), IAEA TS-R-1 (1996), USNRC 10CFR34, 10CFR71, 49CFR173, MA-1059-D-334-S, and CNSC R-061-0001-2-2012. Additionally, the exposure devices are designed, manufactured and serviced under a QA program that has been accredited to ISO 9001 (2004) and approved in accordance with USNRC 10CFR71, Subpart H. The QA program also includes the reporting requirements of USNRC 10CFR21 for suppliers of source and by product materials.				
<b>Removable Jacket</b> One-piece, high impact resistant, plastic jacket incorporating a carrying handle and base				
<b>Materials</b> Titanium 'S' Tube, DU Shield, Stainless Steel Tubular Shell and Plates, Aluminum, Brass, Tungsten, and Polyurethane				
<b>Source Assemblies and Authorized Contents</b> USNRC Model Number: A424-9 source assembly with a double encapsulated Ir-192 sealed source. The IAEA/USDOT Special Form Certificate number is USA/0335/S. In addition, the following isotopes may also be utilized in the 880 series exposure devices: Se-75 (USA/0502/S-96), Yb-169 (USA/0597/S-96)				
<b>Isotope</b>	<b>Se-75</b>	<b>Ir-192</b>	<b>Yb-169</b>	
<b>Assembly Model Number</b>	A424-25W	A424-9	91810	
<b>Gamma Energy Range</b>	66-401 keV	206-612 keV	8-308 keV	
<b>Half-Life</b>	120 Days	74 Days	32 Days	
<b>Approximate Steel Working Thickness</b>	3-29 mm	12-63 mm	2-20 mm	
<b>Device/Source Maximum Capacity</b>				
<b>880 Delta</b>	150Ci 5.55TBq	150Ci 5.55TBq	30Ci 1.11TBq	
<b>880 Elite</b>	150Ci 5.55TBq	50Ci 1.85TBq	30Ci 1.11TBq	
<b>880 Omega</b>	80Ci 3.00TBq	15Ci 0.55TBq	30Ci 1.11TBq	
<b>Controls and Guide Tubes</b> 880 Series Projectors are designed, manufactured and approved for use with SENTINEL™ authorized controls and accessories only.				
<b>Inspection Requirements</b> Perform daily pre-operational inspection for any obvious damage to the system. See device operation and maintenance manual for detailed maintenance requirements.				
<b>Maintenance Requirements</b> Most national regulations require inspection and maintenance of the system at quarterly intervals. The complete annual servicing ensures the integrity of the system. Shorter frequencies of inspection and maintenance are required when the system is operated under severe operating environments. In some cases, the system should be serviced immediately after certain jobs in severe environmental working conditions. See device operation and maintenance manual for detailed maintenance requirements.				
<b>Patent Numbers</b>	<b>United States</b>	<b>Canada</b>	<b>Europe</b>	<b>Korea</b>
<b>880</b>	6781114	2425905	1325501B	10-0835460
<b>Jacket</b>	D453570S	N/A	N/A	N/A
<b>Operating Temperature Range</b> -40° F to 300° F (-40° C to 149° C)				