

# HIGH-RES & WIRELESS D-DR SERIES

FLAT PANEL DETECTORS



DISTRIBUÉ PAR / DISTRIBUTED BY:

**QNDE**   
QUALITY NDE LTD

#### QUEBEC

164, St-Jean-Baptiste  
Mercier, QC J6R 2C2  
450-691-9090  
info@qn.de.ca



#### ONTARIO

275, Sheldon Drive, Unit 3  
Cambridge, ON N1T 1A3  
519-894-9069  
nadams@qn.de.ca

[www.qn.de.ca](http://www.qn.de.ca)

#### ALBERTA

7307, 50 street NW  
Edmonton, AB T6B 2J9  
587-689-6811  
lfields@qn.de.ca

1-800-361-3630

 **DÜRR  
NDT**

# PORTABLE FLAT PANEL DETECTORS

*RUGGED AND RELIABLE FOR INDUSTRIAL APPLICATIONS*



## **D-DR 1025B NDT**

*Bendable and high-resolution detector, perfectly suited for inspecting circumferential weld seams on pipes with diameters of 150 mm and above.*

- ✓ 99 µm pixel pitch (5.0 lp/mm)
- ✓ 97 x 249 mm active area
- ✓ Equipped with internal shielding for use up to 450 kV
- ✓ Innovative bending mechanism to replace traditional film
- ✓ Connection Unit with built-in wireless access point and battery
- ✓ Simple mounting system
- ✓ Exposure possible on both sides of detector
- ✓ Dust-tight and waterproof



*The detector can be easily attached to a pipe with 2 straps and then rotated along the weld seam.*



## **D-DR 1043B NDT**

*Bendable and high-resolution detector, perfectly suited for inspecting long circumferential weld seams on pipes with diameters of 300 mm and above.*

- ✓ 99 µm pixel pitch (5.0 lp/mm)
- ✓ 97 x 427 mm active area
- ✓ Equipped with internal shielding for use up to 450 kV
- ✓ Innovative bending mechanism to replace traditional film
- ✓ Connection Unit with built-in wireless access point and battery
- ✓ Simple mounting system
- ✓ Exposure possible on both sides of detector
- ✓ Dust-tight and waterproof



*The bundled Connection Unit provides wireless connectivity and supplies the detector with power via battery.*



## **D-DR 7 NDT**

*CMOS detector for ultra-high resolution X-ray imaging. Ideal for small tubes. Can also be positioned in hard-to-reach places or even inside objects.*

- ✓ 19 µm pixel pitch (26.3 lp/mm)
- ✓ 26 x 36 mm active area
- ✓ Meets aerospace standards
- ✓ Compact design
- ✓ Simple fixing system
- ✓ Robust aluminum housing
- ✓ Optional active cable extension
- ✓ Optional positioning tool with various shielding plates



*The positioning tool allows easy placement of the D-DR 7 NDT CMOS detector as well as the attachment of shielding plates.*




### **D-DR 1024 NDT**

*Compact and high-resolution detector designed for portability and the harsh conditions of industrial radiography. Perfectly suited for weld inspection.*

- ✓ 76 µm pixel pitch (6.5 lp/mm)
- ✓ 97 x 233 mm active area
- ✓ Suitable for X-ray and gamma sources
- ✓ Equipped with internal shielding for use up to 350 kV
- ✓ Extremely robust design with detachable carry handle
- ✓ Built-in wireless access point
- ✓ Connector for Gigabit Ethernet and power
- ✓ 1 meter drop test pass
- ✓ Dust-tight and waterproof
- ✓ Optional positioning tool



*The carry handle and the housing can be removed to allow the detector to be inserted into hard-to-reach areas such as inside pipes.*

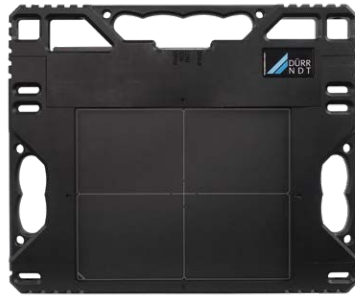


### **D-DR 2329 NDT**

*Medium size high-resolution detector designed for portability and the harsh conditions of industrial radiography. The best choice for universal use.*

- ✓ 75 µm pixel pitch (6.7 lp/mm)
- ✓ 230 x 288 mm active area
- ✓ Equipped with internal shielding for use up to 450 kV
- ✓ Hot-swap function enables battery change during operation
- ✓ Built-in wireless access point
- ✓ Connector for Gigabit Ethernet and power
- ✓ Dust-tight and waterproof



*All wireless detectors are equipped with LED status indicators for power, operation mode, battery and Wi-Fi.*

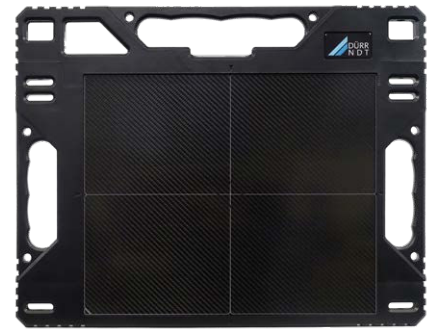

### **D-DR 3643 NDT**

*Large size detector designed for portability and the harsh conditions of industrial radiography. Perfectly suited for profile images and large objects.*

- ✓ 99 µm pixel pitch (5.0 lp/mm)
- ✓ 351 x 427 mm active area
- ✓ Suitable for X-ray and gamma sources
- ✓ Equipped with internal shielding for use up to 450 kV
- ✓ Light-weight full size detector
- ✓ Extremely robust non-glass TFT sensor
- ✓ Hot-swap function enables battery change during operation
- ✓ Built-in wireless access point
- ✓ Connector for Gigabit Ethernet and power
- ✓ 1 meter drop test pass
- ✓ Dust-tight and waterproof



*The hot-swap function enables quick and easy battery change during operation.*



# THE PERFECT SOFTWARE SOLUTION


## DETECT RISKS QUICKLY AND RELIABLY WITH D-TECT X

*D-Tect X provides an optimal and time-saving NDT inspection workflow: from calibration and image acquisition to image evaluation and data import and export, everything you need is included and easy to use.*

With a comprehensive set of features, D-Tect X is fast, intuitive and easy-to-learn. DICONDE file format support ensures that images can be viewed and processed by any other DICONDE compatible system. An interface to DRIVE NDT enables seamless NDT workflow integration. DRIVE NDT is a unique management and reporting tool and is fully integrated into D-Tect X.


- Native DICONDE file format support
- Simultaneous reference image adjustment
- X-Filter: one-click image enhancement
- Image history: track all performed image operations and define presets
- Tools to assist with working with standards (ASME, ASTM, ISO)
- Unlimited image file size support
- Report generation via direct Excel export or DRIVE NDT

- Advanced histogram tools
- SNR/SNR<sub>N</sub> calculation
- Automatic duplex IQI detection and SR<sub>b</sub> determination
- Advanced wall thickness analysis
- Image filters to assist with evaluation
- Length, area and angle measurement tools
- Image annotations with customizable detail information
- Line profile tool
- Panel calibration (offset, gain, bad pixel)
- Multi image editing/processing
- Unrestricted image zoom

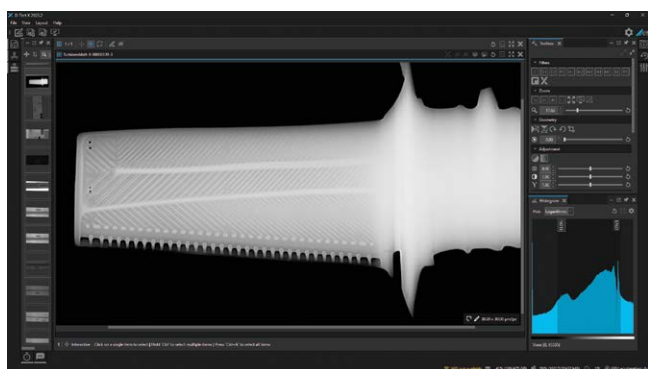


### Easy and reliable evaluation

Consistent quality and detection of the finest details are essential for NDT – specially designed filters and tools makes accurate and effective evaluation possible. To save time, it is also possible to save optimal evaluation settings for use with subsequent images.

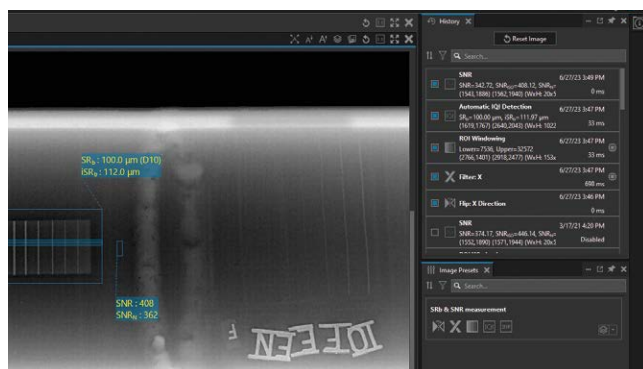


### Image operation history and presets

Every action applied to an image since it was imported or acquired is recorded and each can be individually activated or deactivated. Any combination of actions can also be saved as a preset and applied to other images with a single click.

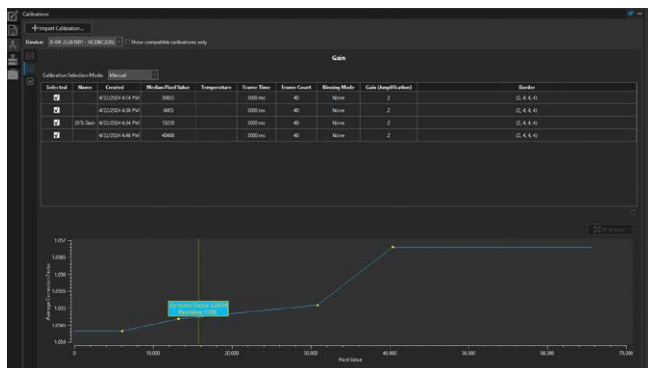

### Multi-gain calibration

Multiple gain calibrations at various radiation doses can be applied during acquisition in order to achieve the best image quality possible.

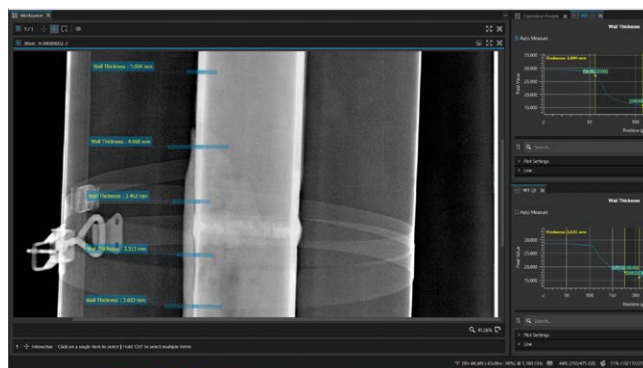

### One-click Wall Thickness Tool

This optional tool determines the thickness at one or more points along the wall of a pipe. The measurement is performed with a single click on the point to be measured and can be moved if necessary.

## Technical data

## D-DR 1025B NDT


## D-DR 1043B NDT

## D-DR 7 NDT

<b>Active area</b>	97 mm x 249 mm (3.82" x 9.8")	97 mm x 427 mm (3.82" x 16.8")	26 mm x 36 mm (1.0 x 1.4")
<b>Bendable</b>	Minimum pipe diameter 150 mm (6")	Minimum pipe diameter 300 mm (12")	N/A
<b>Dimensions detector / incl. housing</b> (H x W x D)	182 mm x 453 mm x 20 mm 225 mm x 555 mm x 34 mm	182 mm x 633 mm x 20 mm 225 mm x 733 mm x 34 mm	31.5 mm x 50 mm x 8.3 mm -
<b>Weight detector / incl. housing</b>	1.5 kg (3.3 lbs) 2.0 kg (4.4 lbs)	1.7 kg (3.7 lbs) 2.2 kg (4.8 lbs)	0.15 kg (0.33 lbs) -
<b>Number of pixels</b>	981 x 2517	981 x 4309	1368 x 1896
<b>Frame time</b>	0.5 s to 180 s	0.5 s to 180 s	0.5 s to 180 s
<b>Image transfer time</b> (wired/wireless)	1.5 s / 3 s	1.5 s / 3 s	2 s / -
<b>Maximum energy</b>	450 kV (for long life in typical applications)	450 kV (for long life in typical applications)	70 kV (for long life in typical applications)
<b>Pixel pitch</b>	99 µm	99 µm	19 µm
<b>Maximum SR<sub>b</sub></b> (basic spatial resolution)	100 µm (Fine), 130 µm (Standard)	100 µm (Fine), 130 µm (Standard)	25 µm
<b>Scintillator options</b>	GOS Fine, GOS Standard	GOS Fine, GOS Standard	CsI
<b>ADC</b>	16-bit	16-bit	12-bit
<b>Interface</b>	Gigabit Ethernet, WLAN: 2.4 GHz (802.11n) / 5 GHz (802.11ac)	Gigabit Ethernet, WLAN: 2.4 GHz (802.11n) / 5 GHz (802.11ac)	USB 2.0, USB 3.0 compatible (cable length 4.5 m)
<b>Battery</b>	Lithium-ion (11.55 V, 39.3 Wh)	Lithium-ion (11.55 V, 39.3 Wh)	-
<b>Operating conditions</b>	-20 to 50°C (-4 to 122°F), 10 to 90 % humidity	-20 to 50°C (-4 to 122°F), 10 to 90 % humidity	10 to 35°C (50 to 95°F), < 80 % humidity
<b>Protection level</b>	IP67 (dust-tight and waterproof)	IP67 (dust-tight and waterproof)	-
<b>Software</b>	DÜRR NDT D-Tect X	DÜRR NDT D-Tect X	DÜRR NDT D-Tect 9.5 or higher
<b>Accessories</b>			Positioning tool with shieldings



The D-DR 1025B NDT can be bent continuously from flat to a 150 mm diameter in one direction, the D-DR 1043B NDT to a 300 mm diameter.

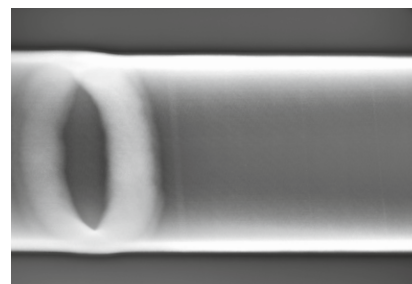

Weld seam, 5 mm diameter pipe with 1.2 mm wall thickness, X-ray (13 FE ISO: W19).

## Technical data

## D-DR 1024 NDT


## D-DR 2329 NDT

## D-DR 3643 NDT


<b>Active area</b>	97 mm x 233 mm (3.82" x 9.2")	230 mm x 288 mm (9.05" x 11.33")	351 mm x 427 mm (13.8" x 16.8")
<b>Bendable</b>	N/A	N/A	N/A
<b>Dimensions detector / incl. housing</b> (H x W x D)	132 mm x 335 mm x 30 mm 184 mm x 421 mm x 44 mm (without handle)	322 mm x 355 mm x 17 mm 391 mm x 473 mm x 27 mm	384 mm x 460 mm x 15 mm 470 mm x 602 mm x 25 mm
<b>Weight detector / incl. housing</b>	2.2 kg (4.9 lbs) 2.9 kg (6.4 lbs)	3.4 kg (7.5 lbs) 4.7 kg (10.3 lbs)	4.1 kg (9 lbs) 6.1 kg (13.4 lbs)
<b>Number of pixels</b>	1280 x 3072	3072 x 3840	3548 x 4316
<b>Frame time</b>	0.5 s to 180 s	3 s to 180 s	0.5 s to 180 s
<b>Image transfer time</b> (wired/wireless)	1.9 s / 2.6 s	2 s / 3 s	3.5 s / 5 s
<b>Maximum energy</b>	350 kV (for long life in typical applications), Isotopes (with typical in-field usage)	450 kV (for long life in typical applications)	450 kV (for long life in typical applications), Isotopes (with typical in-field usage)
<b>Pixel pitch</b>	76 µm	75 µm	99 µm
<b>Maximum SR<sub>b</sub></b> (basic spatial resolution)	80 µm (Ultra-Fine), 130 µm (Plus)	80 µm	100 µm (Fine), 130 µm (Standard), 160 µm (Plus)
<b>Scintillator options</b>	GOS Ultra-Fine, GOS Plus	GOS Ultra-Fine	GOS Fine, GOS Standard, GOS Plus
<b>ADC</b>	16-bit	16-bit	16-bit
<b>Interface</b>	Gigabit Ethernet, WLAN: 2.4 GHz (802.11abgn) / 5 GHz (802.11ac)	Gigabit Ethernet, WLAN: 2.4 GHz (802.11n) / 5 GHz (802.11ac)	Gigabit Ethernet, WLAN: 2.4 GHz (802.11n) / 5 GHz (802.11ac)
<b>Battery</b>	Lithium-ion (11.25 V, 33.2 Wh)	2 x Lithium-ion (7.6 V, 23.6 Wh)	2 x Lithium-ion (11.55 V, 39.3 Wh)
<b>Operating conditions</b>	0 to 45°C (32 to 113°F), 30 to 85 % humidity	-20 to 50°C (-4 to 122°F), 10 to 90 % humidity	-20 to 50°C (-4 to 122°F), 10 to 90 % humidity
<b>Protection level</b>	IP67 (dust-tight and waterproof)	IP67 (dust-tight and waterproof)	IP67 (dust-tight and waterproof)
<b>Software</b>	DÜRR NDT D-Tect X	DÜRR NDT D-Tect X	DÜRR NDT D-Tect X
<b>Accessories</b>	Positioning tool		



Thin-walled stainless steel cylinder with longitudinal weld seam.

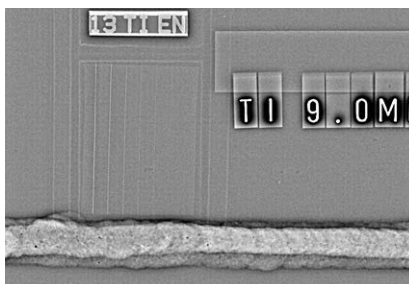

Weld seam, 9 mm titanium plate, X-ray (ISO 17636-2 Class B compliant).

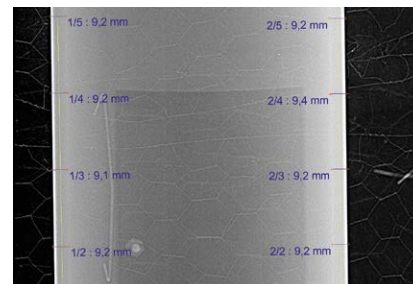

Profile image, DN 150 x 9 mm, Iridium-192.

DISTRIBUÉ PAR / DISTRIBUTED BY:



### QUEBEC

164, St-Jean-Baptiste  
Mercier, QC J6R 2C2  
450-691-9090  
info@qn.de.ca



### ONTARIO

275, Sheldon Drive, Unit 3  
Cambridge, ON N1T 1A3  
519-894-9069  
nadams@qn.de.ca

### ALBERTA

7307, 50 street NW  
Edmonton, AB T6B 2J9  
587-689-6811  
lfields@qn.de.ca

www.qn.de.ca

1-800-361-3630

