

SPECTROLINE®

TESTED AND COMPLIES WITH



ASTM
E3022-18
Standard

MEETS
EN ISO:3059
Specifications

CLARITY™ 365 SERIES

HIGHEST QUALITY
LONGEST RUNNING
MOST CONVENIENT

COMPLIANT LED UV-A FLASHLIGHT
IN THE WORLD!

- ✓ **9 HOURS RUN TIME!** vs. 2-3 hours from other lamps
- ✓ **WIRELESS INDUCTION CHARGING*** vs. other lamps with offboard and dust ingress
*Lithium Ion model only
- ✓ **OUTPUT REGULATOR** vs. lamps that can fall out of compliance



WHY CLARITY™?



LONGEST BATTERY LIFE ON THE MARKET



AUTO SHUT-OFF
Keeps Intensity Above Minimum Output



**IP68
RATED**

**WATER-PROOF,
DUST-PROOF**



WIRELESS CHARGER*
Induction Charger Kit Included
*Lithium Ion model only



CLARITY Spray Mount Accessory # RP-SM-01

Specially crafted lamp attachment permits lamp and spray can to be mounted together for convenient, single-handed fluorescent yoke inspection.

**SPRAY &
INSPECT IN
ONE
SIMPLE STEP!**

CLARITY™ 365 SERIES

| MODEL | NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) ❶ | VISIBLE LIGHT MEASUREMENT | UV-A COVERAGE DIAMETER at 15 in (38 cm) at minimum 1,000 µW/cm² |
|-------------------------------------|---|------------------------------|---|
| HIGH INTENSITY MODELS | | | |
| SPN-CLR365-HC (Lithium-Ion Battery) | 6,500 µW/cm² | < 1 foot-candle (11 lux) | 3 in (7.62 cm) |
| SPN-CLR-BHA (Alkaline Battery) | | | |
| STANDARD INTENSITY MODELS | | | |
| SPN-CLR365-SC (Lithium-Ion Battery) | 4,500 µW/cm² | < 1 foot-candle (11 lux) | 3.5 in (8.9 cm) |
| SPN-CLR-BA (Alkaline Battery) | | | |



| | | |
|----------------------------|----------------------------------|------------------------------|
| Light Source: | (1) UV-A LED | (1) UV-A LED |
| Lamp Style: | Cordless Flashlight | Cordless Flashlight |
| Lamp Head Diameter: | 1 in (2.6 cm) | 1.75 in (4.5 cm) |
| Length: | 7 in (17.8 cm) | 8.75 in (22.2 cm) |
| Weight: | 0.8 lbs (363 g) (with Battery) | 1.2 lbs (544.3 g) |
| Power Requirements: | Lithium-Ion Rechargeable Battery | Alkaline Battery (3 C-Cells) |
| Run Time: | 9 hours (continuous) | 9 hours (continuous) |
| Charge Time: | 6 Hours | N/A |

① UV-A intensity reading taken with the Spectroline® AccuMAX™ Series meter, and is factory set to the value shown.


UV-A Beam Profile

HIGH INTENSITY MODELS

SPN-CLR365-HC & SPN-CLR-BHA MODELS

Surface Contour Profile at 15 in (38 cm)

Top Intensity Profile at 15 in (38 cm)

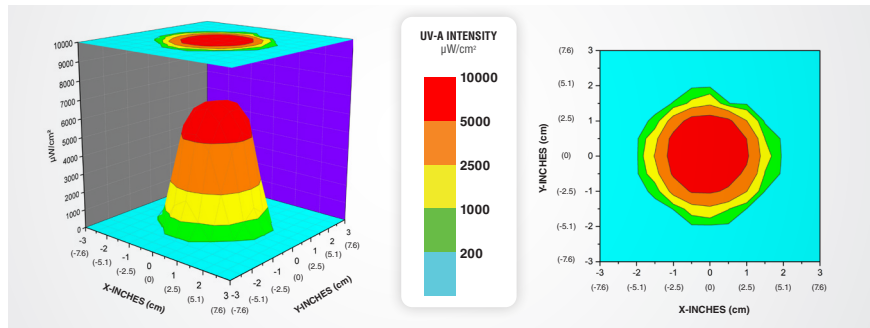


STANDARD INTENSITY MODELS

SPN-CLR365-SC & SPN-CLR-BA MODELS

Surface Contour Profile at 15 in (38 cm)

Top Intensity Profile at 15 in (38 cm)

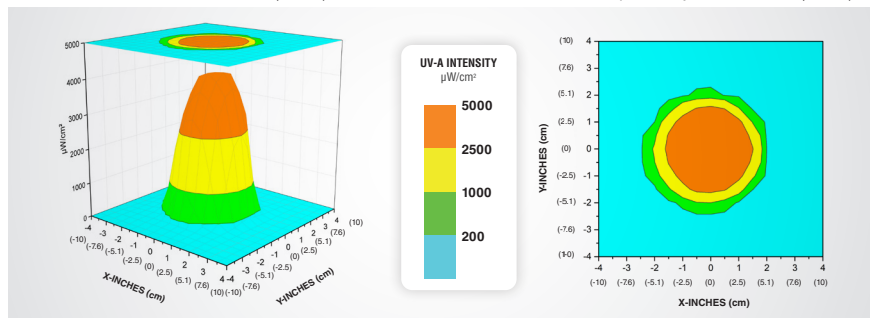

CLARITY™ 365 KIT:

SPN-CLR365-HC & SPN-CLR365-SC

Lithium-Ion Kit Includes:

Flashlight with battery, induction charging dock, AC power cord, USB power cord, belt holster, UV-absorbing spectacles, comes in carrying case.



SPN-CLR-BHA & SPN-CLR-BA

Alkaline Kit Includes:

Flashlight with 3 C-Cell alkaline batteries, belt holster, UV-absorbing spectacles and carrying case.



CERTIFICATE OF CONFORMANCE
included with each lamp



CERTIFICATE OF CONFORMANCE



DISTRIBUÉ PAR / DISTRIBUTED BY:



QUEBEC

164, St-Jean-Baptiste
Merrier, QC J6R 2C2
450-691-3090
info@qnnde.ca

ONTARIO

275, Shearson Drive, Unit 3
Cambridge, ON N1T 1A3
519-894-9069
nede@qnnde.ca

ALBERTA

7307, 50 Street NW
Edmonton, AB T6B 2J9
587-689-0011
Red@qnnde.ca

www.qnnde.ca

1-800-361-3630